

Modern Classic SLRs Series : Canon F1 - Booster T Finder (Operation)

This section covers:

Loading the Battery
Checking the Battery
Attachment *

Next [Section](#) Covers:

Metering with Booster
Metering with Camera
Metering with High Film Speed
Using External Power Source



This page has a converted pdf file (224 K) for download. Click on icon to proceed.

Credit: Tony Kano (Ex-Regional Head (Asia), Richard Yeow (Division Head-Malaysia) of Canon Marketing who share the same enthusiasm for making this site possible for all Canon Fans.

We suggest *strongly* to use a detailed illustration of various dials and control buttons on the [Booster T Finder](#) & Canon [F-1 Body](#) for cross reference.


Loading the Battery

One 6V silver battery No. 544 is used. Screw the cover of the battery chamber off and load the battery with the (3 side facing towards you).



Checking the Battery

Turn the main switch to the "C" side and check the position of the needle in the Booster's meter window. When the needle swings to the blue mark, the battery has sufficient voltage. Otherwise, replace the battery with a new one.

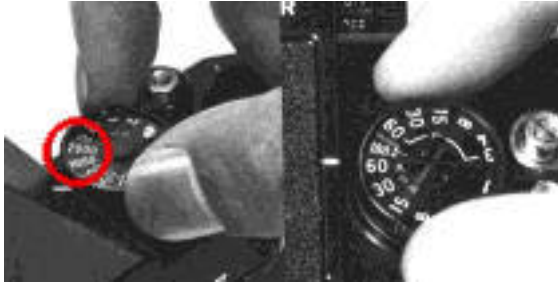

Attachment *

1. When attaching, set the same film speed on both the camera side and the Booster side.
2. Set the shutter speed on the camera side at a speed of less than 1/30 of a second. Then attach the Booster T Finder.
3. Once attached, turn the shutter speed dial of the Booster to either left or right to couple it with the camera side.



| [Next](#) |

| Back to [Main Index](#) - Booster T Finder Page |

| Back to Canon F-1 [Main Index](#) Page |

[Home](#) - Photography in Malaysia



Copyright © 1996 [leofoo](#) [member of the MIR Web Design Team.] All Rights Reserved